

FCUS0582

Disinfection Air Sanitizing Fogger







The mist of hypochlorous acid with strong oxidating property is attached on aerosol/dust particles to effectively eliminate viruses










- 1,Large water injection port, 2, Muffler
- 3, Easy handle
- 4, Turbine fan
- 5, Water shortage protection
- 6,Active filter

Product Name	Ultrasonic Atomizer	
Model /	FCUS0582	
Voltage /	~100V-240V 50Hz/60Hz	
Power /	220V	
Type: /	Mist Impeller	
Evaporation	1350ml/h,	
Fog output	3KG/H (heavy fog Ultrasonic nozzle)	
Material	ABS	
Capaqity	13L	















Meeting Room


Supermarket

Store

Plant





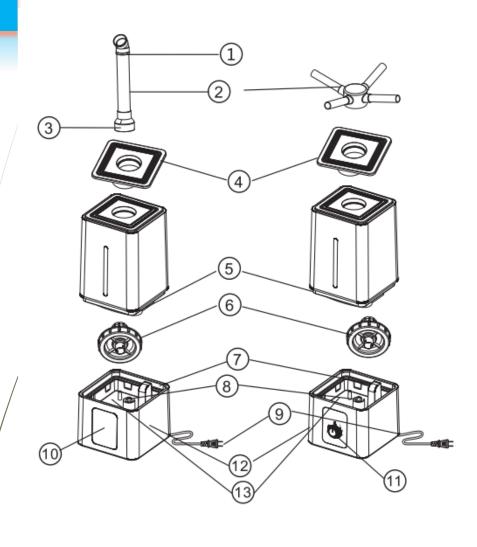


- 1、Spout
- 2、mist pipe
- 3. Mist pipe joint
- 4, water tank cover
- 5、Add water place
- 6、tank cap


- 7, wind window
- 8、floater
- 9. Power cord
- 10、display screen
- 11、Switcher
- 12、Base part
- 13、atomization sheet







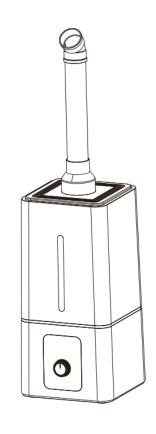

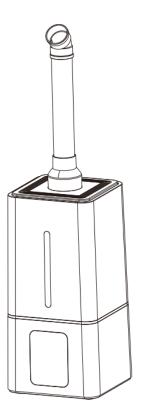



Daily maintenance

Keep the machine clear, pls pour away the water, clean the machine aperiodically, clean the limescale and the dust gauze frequently, keep it is dry, and store it in dry place.

The way to clear the atomization sheet and base channel

Pull out the plug before cleaning the machine.

Dilute the detergent and pour it into the base, adding 45 $^{\circ}$ C water to dissolve detergent. Soak for 10 minutes and gently scrub the surface with small brush until scale is removed. Wash the base with 1:1 of water and white vinegar or citric acid. Then clean the base ad surface with water.







Product instructions:

- 1. Don't lay anything bellow the machine, it will effect the air intake.
- 2. Take off the spout, turn over the water tank, turn the tank cap counterclockwise.
- 3. After adding water, turn the tank cap back,and make sure it will don't leakage, install the water tank onto the base part.
- 4. Automatic shut off upon empty tank, when lacking water, the light will be red, and the machine will stop working, if want it working again, pls pull out the plug, and add water, couldn't add any medicine or acid-base liquid.
- 4. You can change the length of the PVC pipe as you want.

Mechanical model

- 1/Install the water tank onto the base part after filling water.
- 2.Insert 220V/50Hz, switch the switcher clockwise.
- eta.The light will turn on, and adjust the mist level as you want.







Electronic model:



NO/OFF,Plug in power cable. It is in standby mode and pop up white lights on the screen Press power on button and the standby mode is canceled, Humidifier start to work in high mode.



3 speeds mist button, touch this button, it will start to work in high mode, and all lights will turn on, touch the button again, it will be in low mode, and 9 lights will turn on, touch the button again, it will be in middle mode, and 18 lights will turn on.



Timer button, touch this button, we can set time from 1 to 16 hours(if there are 2 or more figures on the display screen, the setting time will be the sum total.)



Humidity/Constant humidity button: set humility between 45%-95%. user press this button until it reaches 95%. press one more time to cancel settings. Set a certain value and the humidifier will work automatically. when the humidity in the room is achieving this value, it will stop working until humidity getting lower.the tolerance will be around +-5%.the constant humidity button in remote control is 70%.

Ion button, touch this button, the light will turn on, and the ion is in working mode, touch this button again, the light will turn off, and this function is canceled.

Remark: the function of ion is cleaning the air, eliminate second hand smoking, prevent electrostatic and so on.

Appointment button, touch this button, the figures on the display will running, it is in appointment mode, we can set the time from 0 to 24 hours, once the user finished the setting, the temperature and setting time will display on the screen alternately, if we don't set time, it will only display the temperature on the screen.









night mode, press this button 3 seconds ,the machine will enter sleep mode. the light on the screen will turn down. other functions are working as normal.

SAFETY INSTRUCTIONS:

When using electrical appliances, basic precautions should always be followed to reduce the risk of fire, electric shock, injury to person.

- 1. Pls don't repair or adjust the product base by yourself.
- 2. Pls don't try to replace the power cord when it is broken by yourself, you can ask our service department to do it.
- 3. Pls don't add any kind of additive into the water tank which was not recommended by ourself.
- 4. Please keep the humidifier away from the children
- 5. Any change or refitting without our confirmation will be dangerous.
- 6. Please immediately turn off the humidifier and unplug the power when there is an abnormal sound or smell, pls contact with the service department if you want to repair it.
- \rlap/T . Unplug the humidifier when moving or cleaning it.
- 8. Unplug the humidifier when not in use.
- 9. Do not attempt to empty, fill, and tilt the humidifier while it is working.
- 10.Please don't touch the water or the units in the flume when it is in operation mode.







- 11.Please don't turn on the machine when there is no water.
- 12.please don't use the machine in high humidity atmosphere, such as shower room.
- 13. Please don't use the machine on wood floor or bamboo floor.
- 14. Please don't scrape or scratch the atomization sheet with hard particles.
- 15. Please don't let water run into the inside of the base part.
- 16. Please use the low mode when low temperature or high humidity in case the mist couldn't run out smoothly.
- 17. Please duly handle the scrapped machine, don't discard it optionally.
- 18. In order to save the service life of the machine and avoid accident, please lay it in dry condition.
- 19. Place the humidifier on a flat, smooth, level surface.
- 20. Far away from the fire, such as the stove, avoid direct sunlight.
- 21. Please use the machine at the normal environment temperature.
- 22. The mist direction should be aimed away from walls, electric appliances, furniture

Symptoms	Reason analysis	Solutions
No wind nor mist	The plug is not connected properly	Insert the plug correctly
	The power is off	Turn on the power
	No water or little water in the tank	Fill enough water
Low mist	Has scale on the surface of the atomization sheet or dirty water	Clean the atomization sheet and change the water.
Abnormal smell	New machine	Open the water tank and lay it open in a steady and cool place for 12 hours
	Water is not clean or stored in the machine for a long time	Clean the tank and change with clean water
Abnormal sound	Water tank is put incorrectly	Re-put the water tank correctly
	Resonance caused by little water in the tank	Fill enough water
Mist going around the spout	Resonance caused by unsteady table	Put the appliance on a steady table





Application Scenario

Provide professional technical and tutoring installation for free



Supermarket



Apartment lobby



Restaurant



hotel lobby



Schools



office lobby

Multitarking Corporation ltd

289 Dagang san Road Beilun District Ningbo Zhejiang ,China.
647, Yeogsam-Dong, Gangnam-gu, Seoul, Korea
301-307, Lockhart Rd, Wan Chai, Hong Kong
2 Main Street, Suite 310,Stoneham, MA, 02180, USA
Clarke Road,Milton Keynes,Buckinghamshire,MK1 1ZR,UK
Email:info@multitaskingcorporation.com

